



2017-2024 Ditch Light Bracket Installation Guide

Professional installation recommended

Included in the kit:


1 driver side ditch light bracket

1 passenger side ditch light bracket

2 M8x16 bolts

2 M8 nuts

Step 1. Remove 2 bolts holding driver's side hood hinge to hood.

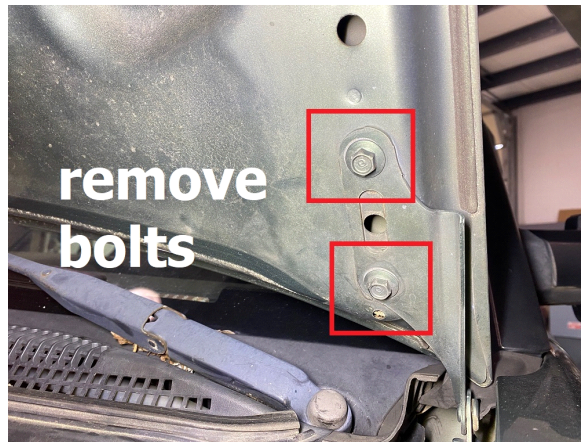

Step 2. Place ditch light bracket on hood hinge.

Step 3. Using paint shadow as a reference, align hood and tighten bolts.



Step 4. Using provided M8x16 bolt and nut, install off-road light of your choice onto bracket. (Hardware provided with lights is typically too long and may contact the hood.)



Step 5. Repeat steps 1-7 for passenger side.

Step 6. Find some trails!

**For tech support, please call 1-844- HRG LIFT (474-5438) from 8-4:30 PM EST
Mon-Thu 8-3:30 PM Fri or email us 24/7 at support@hrgoffroad.com.**

This product is intended for off-road use only!!

Copyright HRG Off-road 2026